

HEAVY-DUTY VERTICAL MACHINING CENTER

Mynx II

Mynx 5400II

Mynx 6500II

Mynx 7500II

Mynx 9500




Mynx II series

5400II • 6500II • 7500II • 9500

The Mynx II series offers a wide product line-up with a Y-axis travel distance that ranges from 550 mm (21.7 inch) to 950 mm (37.4 inch) and a diverse selection of spindle gear type. The wide product line-up enables operators to pick the right machine to work on all materials and sizes.

The Mynx machines are well-known for their durability, stability and strength to machine tough parts. In addition, the DN Solutions' user-friendly EZ work functions have been incorporated to increase the convenience when operating.

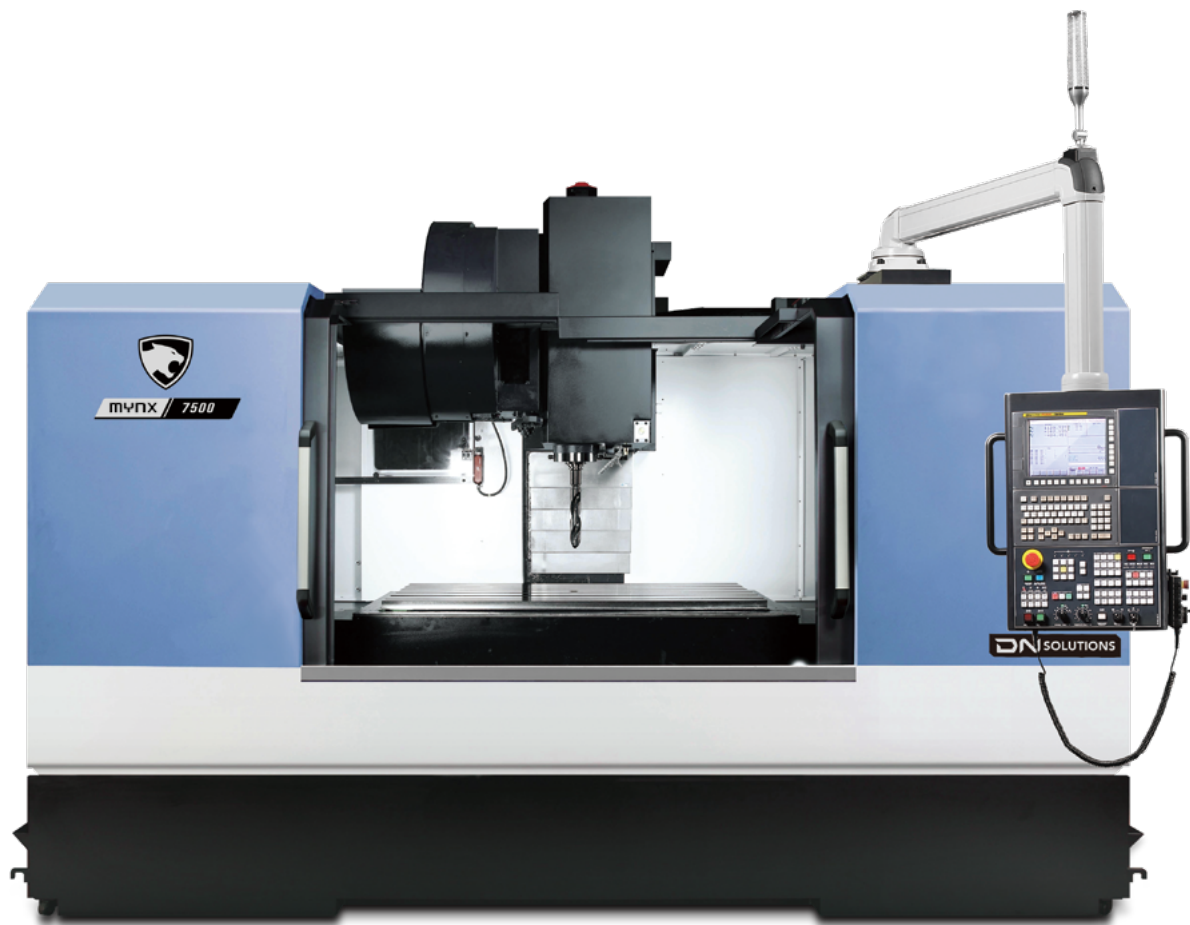

Mynx 7500 II





Mynx 6500 II



Mynx 5400 II

ABILITY TO MACHINE ANY WORKPIECE SIZE AND MATERIAL

- Wide product line-up with a Y-axis travel distance that ranges from 550 mm (21.7 inch) to 950 mm (37.4 inch) and a diverse selection of spindle gear type.

PRODUCTIVITY, PRECISION, STABILITY, AND STRENGTH

- Rigid machine structure that provides durability for performing heavy-duty machining and stability for accurate precision machining.
- Higher productivity can be achieved with the CAM-type tool changer that supports faster tool changing.

USER-FRIENDLY OPERATION

- Easy operation for user's convenient machine operation.
- EZ Work functions to improve our customer experience when operating.

BASIC STRUCTURE

The Mynx II series offers a wide line-up. High-rigidity machine structure provides high durability and stable accuracy during heavy duty cutting.

Travel distance (X / Y / Z axis)

Mynx 5400II, Mynx 5400/50II

1020 / 550 / 530 mm
40.2 / 21.7 / 20.9 inch

Mynx 6500II, Mynx 6500/50II


1270 / 670 / 625 mm
50.0 / 26.4 / 24.6 inch

Mynx 7500II, Mynx 7500/50II

1525 / 770 / 625 mm
60.0 / 30.3 / 24.6 inch

Mynx 9500

2500 / 950 / 850 mm
98.4 / 37.4 / 33.5 inch

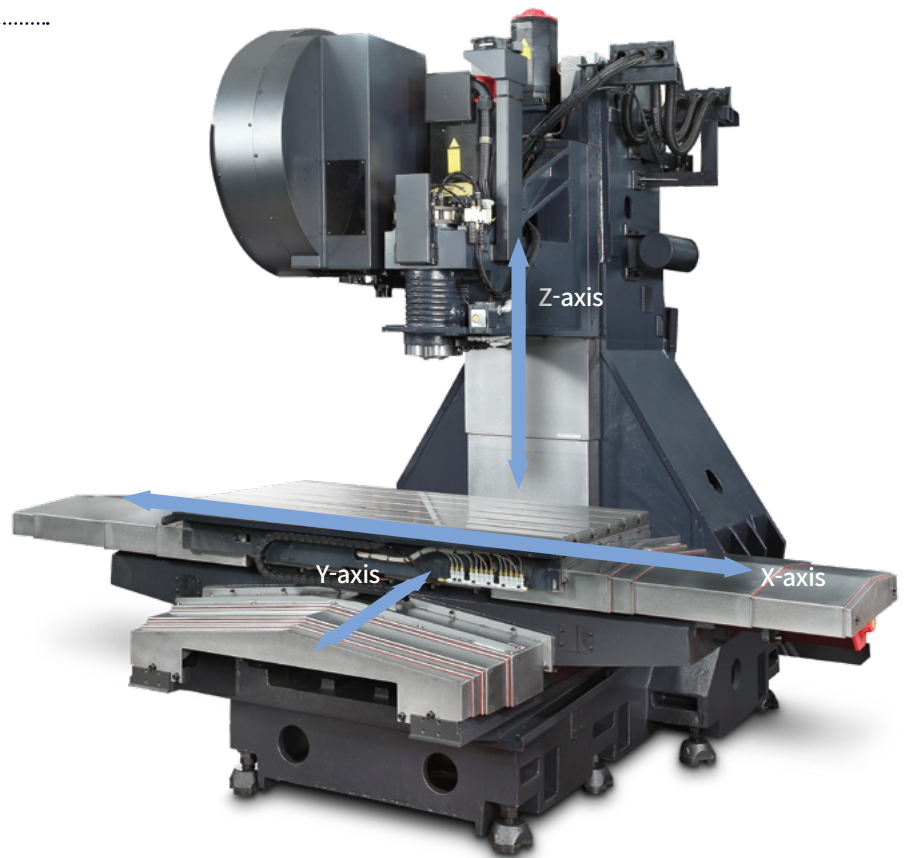

Mynx 5400 II, Mynx 6500 II

AXIS SYSTEM

Applied a highly rigid box guideway structure suitable for heavy cutting. The extended box-type guideways improve the machine durability as well as rigidity and stability.

Rapid traverse rate (X / Y / Z axis)

Mynx 5400II, Mynx 5400/50II

Mynx 6500II, Mynx 6500/50II

Mynx 7500II, Mynx 7500/50II

30 / 30 / 24 m/min
1181.1 / 1181.1 / 944.9 ipm

Mynx 9500

16 / 16 / 16 m/min
629.9 / 629.9 / 629.9 ipm



Surface Finish

The surface of moving elements are coated with Rulon 142 material to reduce friction and stick-slip. This material is carefully hand-scraped to achieve optimum accuracy.

SPINDLE

Users can select spindles of various driving systems and specifications according to the workpiece material.

Drive Systems

The Mynx II series spindles support Direct-driven, Belt-driven, Gear-driven, Built in-driven systems. Dual contact tool system support as standard.


Models	Taper	Standard ¹⁾	Optional ¹⁾
Mynx 5400 II *** Mynx 6500 II *** Mynx 7500 II ***	ISO #40	8000r/min (15/11 kW (20.1/14.8 Hp), 286.5 N·m (211.4 ft-lbs))	12000r/min (15.6 kW (20.9 Hp), 165.5 N·m (122.1 ft-lbs))
Mynx 5400/50 II Mynx 6500/50 II	ISO #50	6000r/min (15/11 kW (20.1/14.8 Hp), 286.5 N·m (211.4 ft-lbs))	6000r/min (18.5/15 kW (24.8/20.1 Hp), 307.2 N·m (226.7 ft-lbs))
			6000r/min* (30/18.5 kW (40.2/24.8 Hp), 617.4 N·m (455.6 ft-lbs))
			8000r/min (15/11 kW (20.1/14.8 Hp), 286.5 N·m (211.4 ft-lbs))
Mynx 7500/50 II	ISO #50	6000r/min (15/11 kW (20.1/14.8 Hp), 286.5 N·m (211.4 ft-lbs))	6000r/min (22/18.5 kW (29.5/24.8 Hp), 365.5 N·m (269.7 ft-lbs))
			6000r/min* (30/18.5 kW (40.2/24.8 Hp), 617.4 N·m (455.6 ft-lbs))
			8000r/min (15/11 kW (20.1/14.8 Hp), 286.5 N·m (211.4 ft-lbs))
Mynx 9500	ISO #50	6000r/min* (30/18.5 kW (40.2/24.8 Hp), 617.4 N·m (455.6 ft-lbs))	10000r/min** (30/25 kW (40.2/33.5 Hp), 420 N·m (310.0 ft-lbs))

None : Belt-driven * : Gear-driven ** : Built in-driven *** : Direct-driven
1) May differ based on NC



Mynx 9500 Gear-driven spindles

* The results, indicated in this catalogue are provides as example. They may not be obtained due to differences in cutting conditions and environmental conditions during measurement.

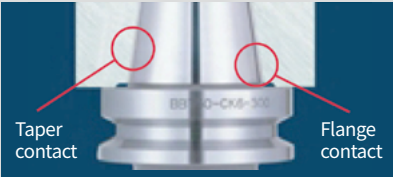

Dual Contact Spindle

The system enables simultaneous dual-contact of tapered side using elastic deformation of the spindle and perfect gauge control.

TABLE


Mynx II series offers an optimized table for machine line up enabling to meet the user to handle a wider range of workpieces.

Max weight on Table

- Mynx 5400II, Mynx 5400/50II
1000 kg 2204.6 lb
- Mynx 6500II, Mynx 6500/50II
1300 kg 2866.0 lb
- Mynx 7500II, Mynx 7500/50II
1500 kg 3306.9 lb
- Mynx 9500
3500 kg 7716.1 lb

Table size (A x B)

- Mynx 5400II, Mynx 5400/50II
1200 x 540 mm 47.2 x 21.3 inch
- Mynx 6500II, Mynx 6500/50II
1400 x 670 mm 55.1 x 26.4 inch
- Mynx 7500II,
1600 x 750 mm 63.0 x 29.5 inch
- Mynx 9500
2500 x 950 mm 98.4 x 37.4 inch

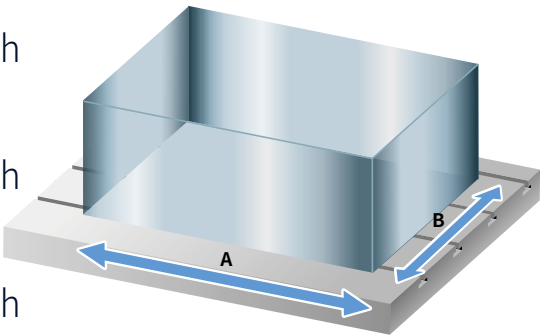

TOOL CHANGER

Higher productivity can be achieved with the CAM-type tool changer that supports faster tool changing.



Chain type CAM magazine



Drum-type CAM magazine

Tool storage capacity

Mynx 5400II, Mynx 6500II, Mynx 7500II

30 ea

40 ea option

Mynx 5400/50II

24 ea

Mynx 6500/50 II

24 ea

30 ea* option

Mynx 7500/50 II

24 ea

40 ea* option

Mynx 9500

30 ea*

40 ea* option

None : Drum-type CAM magazine * : Chain type CAM magazine (Servo type)

Taper


Mynx 5400II, Mynx 6500II, Mynx 7500II

ISO #40

Mynx 5400/50 II, Mynx 6500/50 II

Mynx 7500/50 II, Mynx 9500

ISO #50

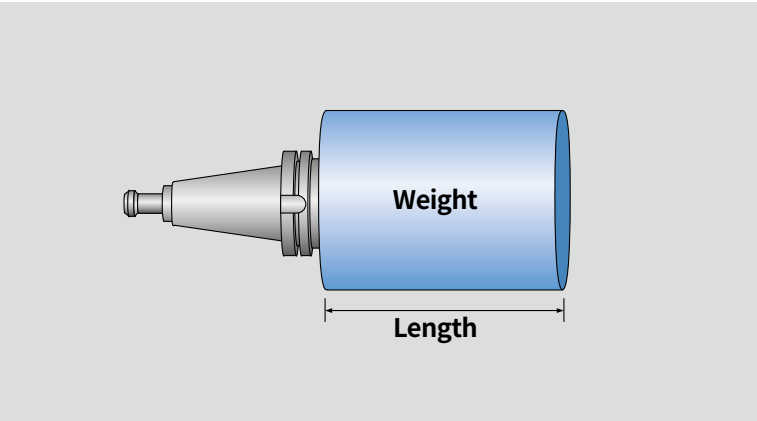

Automatic tool changer

Automatic tool changer

Models	Taper	Tool Change Time		Max. Tool Size	
		T-T-T	C-T-C	Length	Weight
Mynx 5400 II	ISO #40	1.3 s	3.7 s	300mm (11.8 inch)	8kg (17.6 lb)
Mynx 6500 II					
Mynx 7500 II					
Mynx 5400/50 II	ISO #50	2.5 s	5.5 s	350mm (13.8 inch)	20kg (33.1 lb)
Mynx 6500/50 II					
Mynx 7500/50 II					
Mynx 9500			6.7 s		

STANDARD | OPTIONAL SPECIFICATIONS

A range of options is available to suit individual requirements.

Description	Features			Mynx 5400 II	Mynx 5400/50 II	Mynx 6500 II	Mynx 6500/50 II	Mynx 7500 II	Mynx 7500/50 II	Mynx 9500
				Mynx 5400 II SIEMENS	Mynx 5400/50 II SIEMENS	Mynx 6500 II SIEMENS	Mynx 6500/50 II SIEMENS	Mynx 7500 II SIEMENS	Mynx 7500/50 II SIEMENS	Mynx 9500 SIEMENS
Spindle	6000 r/min	Belt**	15/11 kW	X	●	X	●	X	X	X
			18.5/15 kW	X	○	X	○	X	●	X
			22/18.5 kW	X	X	X	X	X	○	X
	8000 r/min	Gear*	30/18.5 kW	X	○	X	○	X	○	●
			15/11 kW	●	X	●	X	●	X	X
			15/11 kW	X	○	X	○	X	○	X
	10000 r/min	Built in*	25/30 kW	X	X	X	X	X	X	○
Spindle cooling system(Oil cooler)	6000 r/min	Direct*	15.6/15.6 kW	○	X	○	X	○	X	X
			Belt**	X	○	X	○	X	○	X
			Gear*	X	●	X	●	X	●	●
	8000 r/min	Direct**		○	X	○	X	○	X	X
			Belt*	X	●	X	●	X	●	X
			Built in*	X	X	X	X	X	X	●
	12000 r/min	Direct*		●	X	●	X	●	X	X
Magazine	Tool storage capacity	24ea		X	●	X	●	X	●	X
		30ea		●	X	●	○	●	X	●
		40ea		○	X	○	X	○	○	○
Tool shank type	ISO #40	BIG Plus BT40		●	X	●	X	●	X	X
		BIG Plus CAT40		○	X	○	X	○	X	X
		BIG Plus DIN40		○	X	○	X	○	X	X
	ISO #50	BIG Plus BT50		X	●	X	●	X	●	●
		BIG Plus CAT50		X	○	X	○	X	○	○
		BIG Plus DIN50		X	○	X	○	X	○	○
Coolant	Flood	0.16/0/12 MPa (0.4 kW)		●	●	●	●	●	●	●
		1.0/0.75 MPa (1.1 kW)		○	○	○	○	○	○	○
		None		●	●	●	●	●	●	●
	TSC	2.0/1.9 MPa (1.5 kW)		○	○	○	○	○	○	○
		2.0/1.3 MPa (4.0 kW)		○	○	○	○	○	○	○
		2.0 MPa (4.0kW)		○	○	○	○	○	○	○
		3.0/3.0 MPa (2.9 kW)		○	○	○	○	○	○	○
		7.0 MPa (7.5 kW)		○	○	○	○	○	○	○
		Shower	0.1/0.065 MPa (1.1 kW)	○	○	○	○	○	○	○
	Top Flushing	0.3/0.2 MPa (1.8 kW)		n/a	n/a	n/a	n/a	n/a	n/a	○
	Oil Skimmer	Belt type		○	○	○	○	○	○	○
	Chip pan			●	●	●	●	●	●	●
Chip disposal	Chip conveyor	Type	Hinged plate	○	○	○	○	○	○	○
			Magnetic scraper	○	○	○	○	○	○	○
		Outlet Direction	Right side/Left side	○	○	○	○	○	○	○
	Chip bucket	Capacity	220 / 300 / 380	○	○	○	○	○	○	○
		Type	ROTATION / FORKLIFT	○	○	○	○	○	○	○
Precision machining option	Smart Thermal Compensation		Sensorless type***	●	●	●	●	●	●	●
	Linear scale		X / Y / Zaxis	○	○	○	○	○	○	○
	AICC II (200 block)			●	●	●	●	●	●	●
Measurement & Automation	Automatic tool measurement	TS27R		○	○	○	○	○	○	○
		OTS		○	○	○	○	○	○	○
	Automatic tool breakage detection	Schubert system elektronik GmbH / BK97		○	○	○	○	○	○	○
	Automatic workpiece measurement	OMP60		○	○	○	○	○	○	○
	Automatic front door with safety device			○	○	○	○	○	○	○
Accessories	Work light	LED lamp		●	●	●	●	●	●	●
	Operator call lamp	3-Color signal tower(Led)		●	●	●	●	●	●	●
	Smart thermal control	Sensorless type (Only spindle)		●	●	●	●	●	●	●
	Assembly & Operation tools kit			●	●	●	●	●	●	●
	Air blower			○	○	○	○	○	○	○
	4th axis preparation cabling for Servo/1-Pneumatic piping	Factory readt made		○	○	○	○	○	○	○
	Air gun			○	○	○	○	○	○	○
Customized special option	Coolant gun			○	○	○	○	○	○	○
	Mist collector			○	○	○	○	○	○	○
	Anchoring ¹⁾			○	○	○	○	○	○	○
	Water soluble Coolant Chiller ²⁾			○	○	○	○	○	○	○
	TSA ³⁾	0.54 MPa		○	○	○	○	○	○	○
	Feedback system	HEIDENHAIN		○	○	○	○	○	○	○
	Raising block	150 / 200 / 300 mm		○	○	○	○	○	○	○
	Side auto door	680 X 1000 (W X H) set		○	○	○	○	○	○	○
	AWC	8Pallet		○	○	○	○	○	○	○
	Auto tool length measurement	RENISHAW / LTS		○	○	○	○	○	○	○
	Auto tool breakage detection	MSC/BK9(Needle type on magazine)		○	○	○	○	○	○	○

* Please contact DN Solutions to select detail specifications.

1) Please refer to foundation drawing in relation to anchoring. If more detail information want, consult with DN Solutions service

2) Technical consultation is mandatory for the chilling of non-water soluble coolant

3) In case of TSC is not required and only TSA is needed, this option can be selected.

*Spindle cooling system (Oil cooler) is standard **Spindle cooling system (Oil cooler) is option ***Sensorless type (only Spindle) (Mynx 5400~7500II)

****When using a semi-synthetic type or synthetic type, contact our sales representative or service center in advance.

● Standard ○ Optional x Not applicable

 Fire Safety Precautions | There is a high risk of fire when using non-water-soluble cutting fluids, processing flammable materials, neglecting the controlled and careful use of coolants and modifying the machine without the consent of the manufacturer. Always check the SAFETY GUIDELINES carefully before using the machine.

PERIPHERAL EQUIPMENT

Linear Scale option


Using the linear scale feedback system, accuracy of the machine can be further improved since the X, Y and Z axes can be controlled to correct positions.

Resolution : 0.001 mm




Smart thermal compensation (Mynx 9500 only)

Smart thermal compensation function fitted as standard optimizes machine accuracy of the spindle and structure by reducing the effects of heat build-up during extended periods of operation.

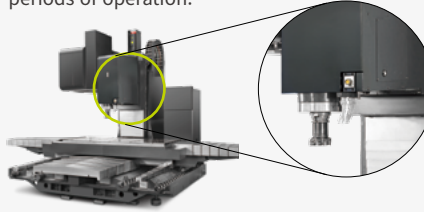


PFC(Programmable Flood Coolant) option

The coolant nozzle direction is controlled by a program. It is adjusted according to the required angle (steps 1 to 15), and it can be used for various tool lengths, thereby improving tool life.

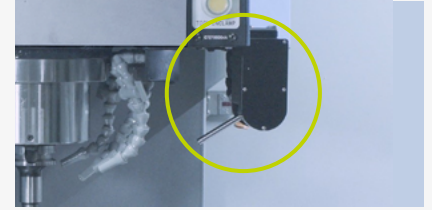

Chip conveyor option

Hinged type



Magnetic scraper type



Drum filter type



Chip conveyor type	Material	Description
Hinged type	Steel	Hinged belt chip conveyor, which is most commonly used for steel work [for cleaning chips longer than 30mm(1.2inch)], is available as an option.
Magnetic scraper type	Cast Iron	Magnetic scraper type chip conveyor, which is ideal for die-casting work [for cleaning small chips], is available as an option.
Drum filter type	Aluminium	Drum filter type chip conveyor, which is ideal for aluminium work [for filtering small chips], is available as an option.


Oil Cooler option

An oil cooler correlated to room temperature can be equipped for a long-term operation at high speed. Cooling oil circulates around the spindle bearings to prevent thermal error of the spindle and maintain machining accuracy.




4th axis auxiliary device interface option

Users who wish to set up a rotary axis on the table to increase application flexibility are encouraged to contact DN Solutions in advance.

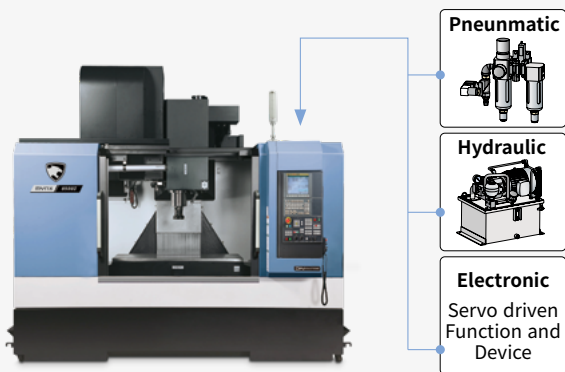

Hydraulic / Pneumatic fixture line option

The user should prepare pipelines for hydraulic / pneumatic fixtures whose detailed specifications should be determined by discussion with DN Solutions.

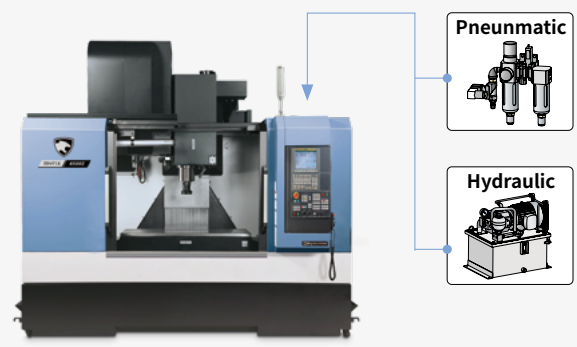

AWC system option


The optimized solution to realize compact automation system through automatic work-piece change system.




Max. workpiece dimensions	Unit	Count	Max. loading	Max. construction height on the pallet
250 x 250 (9.8x9.8) or ø 300 (11.8)	mm (inch)	12	130kg (286.6lb)	350mm (13.8inch)
320 x 320 (12.6x12.6) or ø 360 (14.2)	mm (inch)	10	250kg (551.1lb)	
350 x 350 (13.8x13.8) or ø 400 (15.7)	mm (inch)	8		
400 x 400 (15.7x15.7) or ø 450 (17.7)	mm (inch)	6		
500 x 500 (19.7x19.7) or ø 550 (21.7)	mm (inch)	4		

Pallet Storage-Table Configuration

Unit : mm (inch)



W X H = 1,900 X 1,700

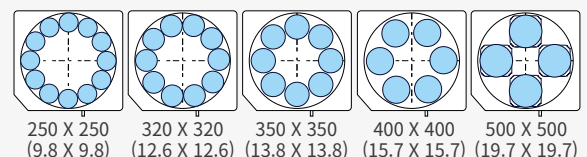

DN SOLUTIONS FANUC i PLUS

DN Solutions Fanuc i Plus is optimized for maximizing customer productivity and convenience.

15 inch screen + new operation panel

DN Solutions Fanuc i Plus' operation panel enhances operating convenience by incorporating common-design buttons and layout, and features the Qwerty keyboard for fast and easy operation.



iHMI touchscreen option

iHMI provides an intuitive interface that uses a touchscreen for quick and easy operation.

Range of applications

Providing various applications related to planning, machining, improvement and utility, for customer convenience.

DN Solutions Fanuc i Plus

- 15 inch color display
- Intuitive and user-friendly design

USB & PCMCIA card

QWERTY keyboard

- EZ-guide i standard
- Ergonomic operator panel
- 2MB Memory
- Hot key



NUMERIC CONTROL SPECIFICATIONS

FANUC

Item		Specifications	DN Solutions Fanuc i (0i Plus) Mynx 4digit
Controlled axis	Controlled axes		3 (X,Y,Z)
	Simultaneously controlled axes		4 axes
	Additional controlled Axis	Add 1 Axis (5th Axis)	●
Data input/output	Fast data server		○
	Memory card input/output		●
	USB memory input/output		●
	Large capacity memory(2GB)*2	Available Option only with 15” Touch LCD (iHMI Only) *2)	○
Interface function	Embedded Ethernet		●
	Fast Ethernet		○
	Enhanced Embedded Ethernet function		●
Operation	DNC operation	Included in RS232C interface.	●
	DNC operation with memory card		●
Program input	Workpiece coordinate system	G52 - G59	●
	Addition of workpiece coordinate system	G54.1 P1 X 48 (48 pairs)	●
	Tool number command		T4 digits
	Tilted working plane indexing command	G68.2 TWP	○
Feed function	AI contour control I	G5.1 Q _ , 40 Blocks	X
	AI contour control II	G5.1 Q _ , 200 Blocks	●
	AI contour control II	G5.1 Q _ , 600 Blocks	X
	AI contour control II	G5.1 Q _ , 1000 Blocks *1)	X
	High smooth TCP		X
Operation guidance function	EZ Guidei (Conversational Programming Solution)		●
	iHMI with Machining Cycle	Only with 15” Touch LCD standard *2)	X
	EZ Operation package		●
Setting and display	CNC screen dual display function		●
Network	FANUC MTConnect		☆
	FANUC OPC UA		☆
Others	Display unit	10.4" color LCD	X
		15" color LCD	X
		15" color LCD with Touch Panel	●
	Part program storage size & Number of registerable programs	640M(256KB) 500 programs	X
		1280M(512KB) 1000 programs	X
		2560M(1MB) 1000 programs	X
		5120M(2MB) 1000 programs	●
		10240M(4MB) 1000 programs	X
		20480M(8MB) 1000 programs	X
		2560M(1MB) 2000 programs	X
		5120M(2MB) 4000 programs	X
		10240M(4MB) 4000 programs	X
		20480M(8MB) 4000 programs	X

*1) The number of look-ahead blocks may be changed or limited depending on the peripheral device or the configuration of the internal NC system.


*2) Available Option only with Fanuc i plus iHMI

EZ WORK

The software developed by DN Solutions provides a range of different functions designed for fast, efficient and convenient operation.

EZ work

The EZ work package delivers speed and efficiency. This menu-driven innovation not only helps customers reduce setup times, but also simplifies common tasks and procedures, reducing the potential for errors. EZ work reduces operating time, protects machinery, enhances quality and speeds up maintenance interventions.

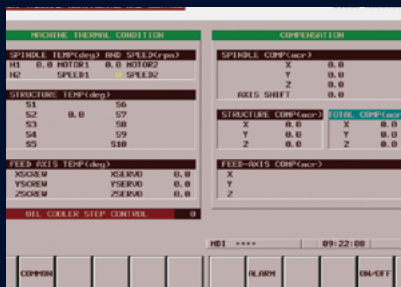

Thermal Compensation

A function to maintain high-precision machining quality by analyzing and correcting the amount of thermal displacement of a structure through a temperature sensor




M/G-Code List

Functional description of M code and G code



Tool Management

Function to manage tool information [Tool information / Tool No. / Tool condition (normal, large diameter, worn / damaged, used for the rst time, manual) / Tool name]

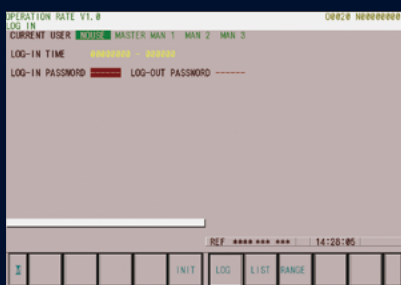


Operation Rate

Machine operation history management function by date based on load



Adaptive Feed Control

Function to control feedrate so that the cutting can be carried out at a constant load (To adapt to the spindle load set up with constant load feedrate control function)

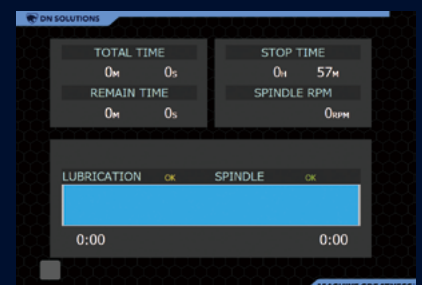


Spindle Warm Up

A function that assists spindle warm-up for spindle life when the spindle has not been used for a certain period of time



ATC Recovery

Function to view detailed info with recommended actions and to perform step-by-step operation manually (when an alarm is triggered during an ATC operation)

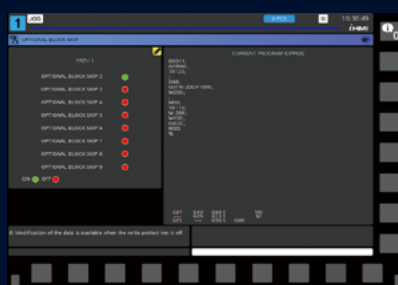

Addition of Optional Block Skip

In addition to the OPTIONAL BLOCK SKIP of the operation panel, the function to skip a specific block selected in the machining program

CONVENIENT OPERATION

HEIDENHAIN TNC620


Superior hardware specifications

The TNC 620 features optimized motion control, short block processing times and special control strategies. Together with its uniform digital design and its integrated digital drive control (including inverters), it enables you to achieve high machining speeds and the best possible contour accuracy.

- 15.6" display
- 21GB Storage memory
- 1024 look ahead blocks
- High user convenience with folder structure data management




Conversational convenient function



Data are controlled in the folder structure; convenient communication via USB devices




KinematicOpt & KinematicComp option
(Touch probe cycle for automatic measurement)




Collision protection system option



Adaptive feed control option



Various built-in pattern cycles for a wider scope of application (Software standard)



Graphic simulation

NUMERIC CONTROL SPECIFICATIONS



HEIDENHAIN

Item		Specifications	TNC620 Mynx series
Controlled axis	Controlled axis		3 (X,Y,Z)
	Simultaneously controlled axis		4 axis
Data input/output	USB memory input/output		●
Interface function	Embedded ethernet		●
Feed function	Look-ahead	5000 blocks	●
Axis compensation	KinematicsOpt	Automatic measurement and optimization of machine kinematics	○
Collision monitoring	Dynamic collision monitoring (DCM)		X
Network	MTConnect		✱
Others	Display unit	15" color LCD with touch panel	●
	Part program storage size & number of registerable programs	4GB	●

● Standard ○ Optional X Not Available ✱ Available

CONVENIENT OPERATION

SIEMENS 828D


15.6" screen + new operation panel

The newly-designed operation panel improves the customer convenience by incorporating and using common-design buttons and layouts, and includes the familiar QWERTY keyboard for fast and easy operation.


- 15.6" display
- 10MB high capacity user memory
- USB & ethernet (standard)
- QWERTY keyboard (standard)
- High-speed calculation and simulation can be fulfilled by improved processor functionality




Conversational convenient function

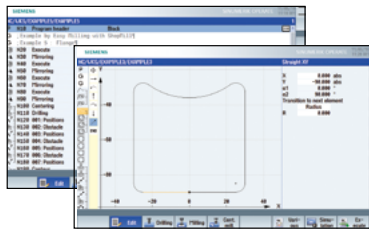


Shop Mill Part Programming

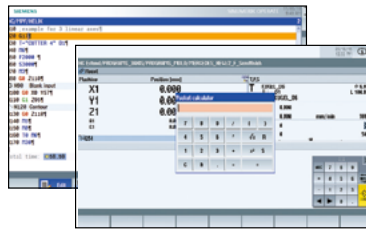


Smart function

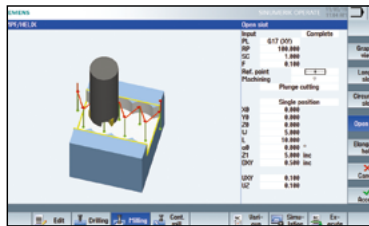

Advanced program language
programGUIDE

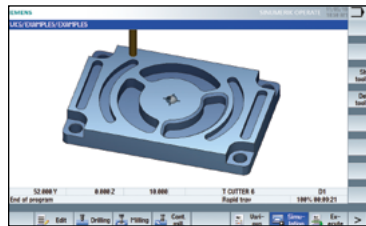

Simulation and machining
contour monitoring

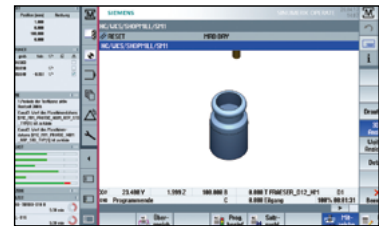

Side screen widget

NUMERIC CONTROL SPECIFICATIONS

SIEMENS

Item		Specifications	S828D Mynx
Controlled axis	Controlled axes	-	3 axis
	Simultaneously controlled axes	-	3 axis
Data input/output	Memory card input/output	(Local drive)	X
	USB memory input/output		X
Interface function	Ethernet	(X130)	●
	On network drive	(without EES option, Extcall)	●
Operation	On USB storage medium, e.g. memory stick	(without EES option, Extcall)	●
	Workpiece coordinate system	G54 - G57	●
Program input	Addition of workpiece coordinate system	G505 - G599	●
	Advanced surface		●
Interpolation & Feed function	Top surface		○
	Look ahead number of block	S/W version 4.95	450
Programming & Editing function	3D simulation, finished part		●
	Simultaneous recording		●
Operation Guidance Function	Measure kinematics		X
	DXF Reader for PC integrated in SINUMERIK Operate		○
Setting and display	ShopMill		●
	EZ Work		●
Network	Operation via a VNC viewer		●
	MTConnect		●
Etc. function	OPCUA		○
	15.6" color display with touch screen		●
	19" color display without touch screen		X
	21.5" color display with touch screen		X
	CNC user memory	10 MB	●
	Expansion by increments	2 ~ 12 MB	○
	Collision avoidance		X
	Collision avoidance ECO (machine, working area)		X

● Standard ○ Optional X Not Available ✱ Available

POWER | TORQUE


FANUC

Mynx 5400 II, Mynx 6500 II, Mynx 7500 II

8000 r/min, Direct

Motor power : 15/11 kW (20.1/14.8 Hp)


Torque : 286.5 N·m (211.4 ft-lbs)

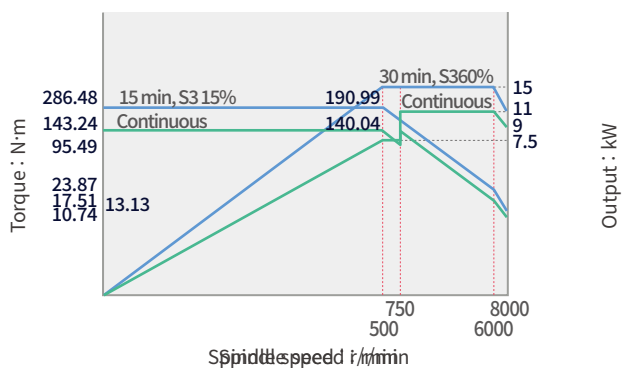

12000 r/min, Direct option

Motor power : 15.6 kW (20.9 Hp)

Torque : 165.5 N·m (122.1 ft-lbs)

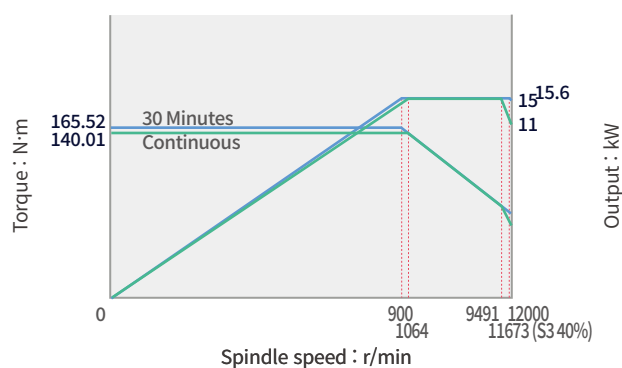


Mynx 5400/50 II, Mynx 6500/50 II

6000 r/min, Belt

Motor power : 15/11 kW (20.1/14.8 Hp)


Torque : 286.5 N·m (211.4 ft-lbs)

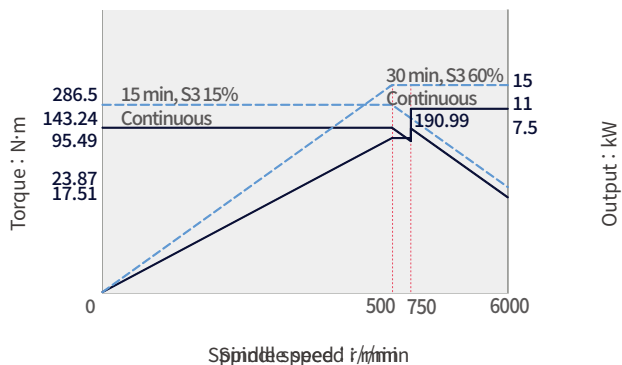

6000 r/min, Belt option

Motor power : 18.5/15 kW (24.8/20.1 Hp)


Torque : 307.2 N·m (226.7 ft-lbs)

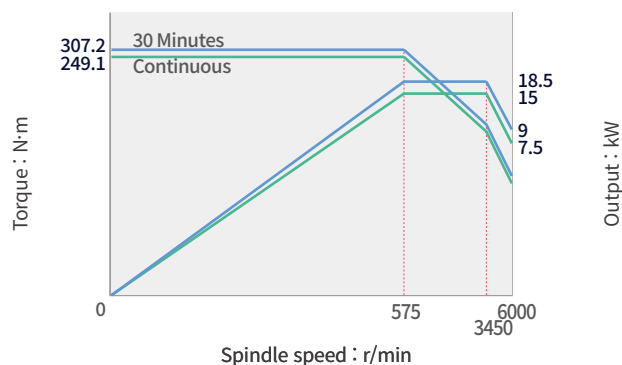

6000 r/min, Gear option

Motor power : 30/18.5 kW (40.2/24.8 Hp)


Torque : 617.4 N·m (455.6 ft-lbs)

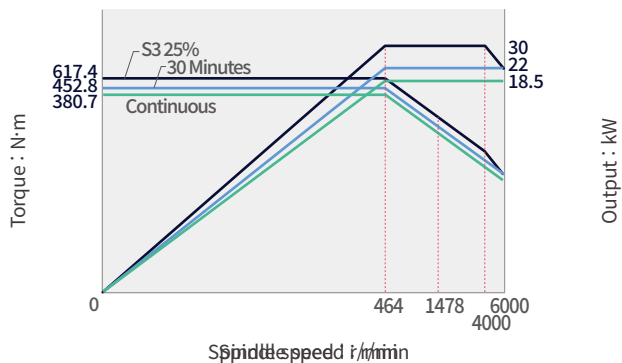

8000 r/min, Belt option

Motor power : 15/11 kW (20.1/14.8 Hp)

Torque : 286.5 N·m (211.4 ft-lbs)

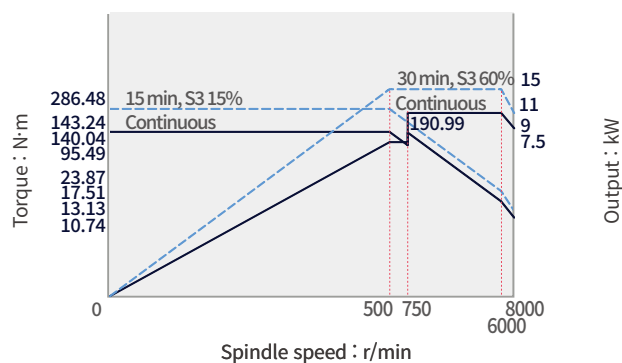


POWER | TORQUE

FANUC

Mynx 7500/50 II


6000 r/min, Belt

Motor power : 18.5/15 kW (24.8/20.1 Hp)
Torque : 307.2 N·m (226.7 ft-lbs)

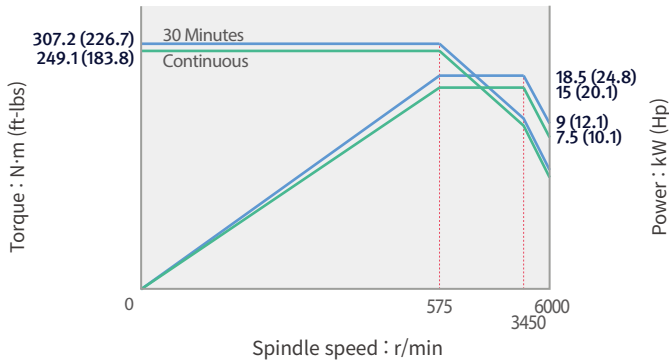


6000 r/min, Belt option

Motor power : 22/18.5 kW (29.5/24.8 Hp)
Torque : 365.5 N·m (269.7 ft-lbs)

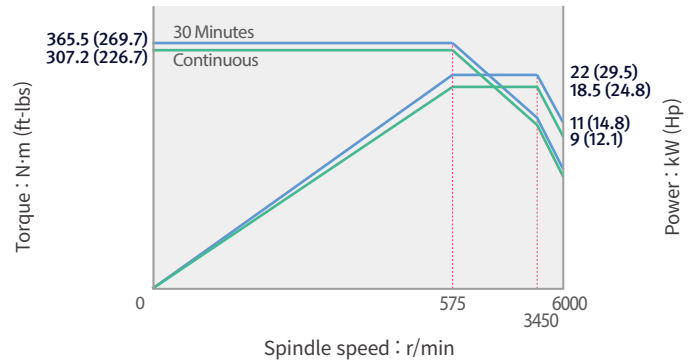


6000 r/min, Gear option

Motor power : 30/18.5 kW (40.2/24.8 Hp)
Torque : 617.4 N·m (455.6 ft-lbs)

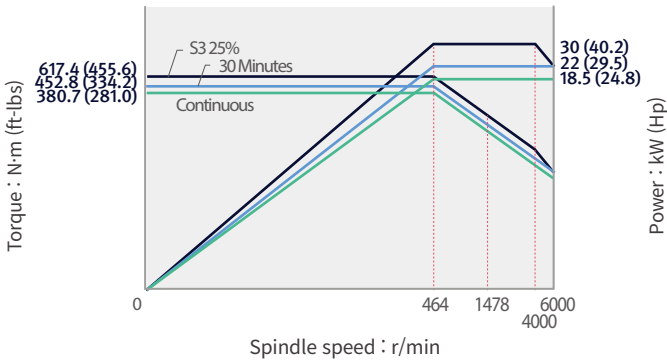

8000 r/min, Belt option


Motor power : 15/11 kW (20.1/14.8 Hp)
Torque : 286.5 N·m (211.4 ft-lbs)

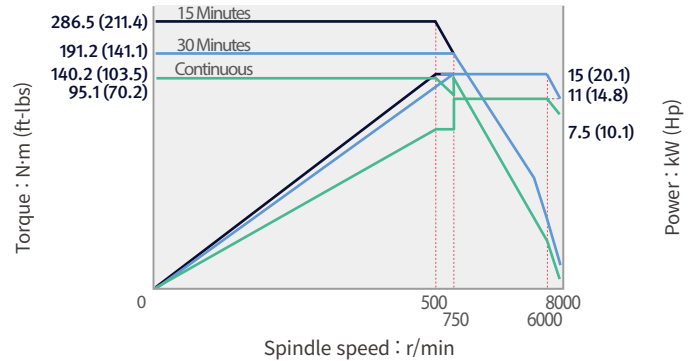

Mynx 9500


6000 r/min, Gear

Motor power : 30/18.5 kW (40.2/24.8 Hp)
Torque : 617.4 N·m (455.6 ft-lbs)

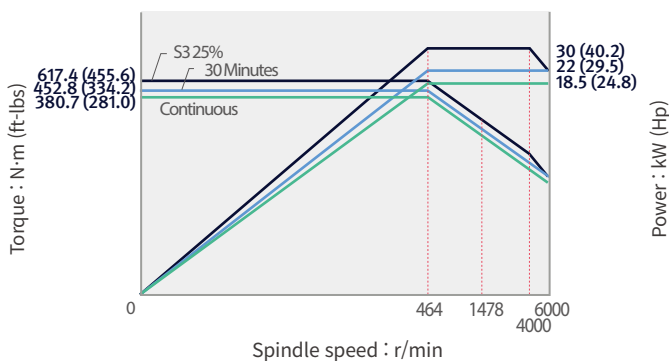

10000 r/min, Built in option

Motor power : 30/25 kW (40.2/33.5 Hp)
Torque : 420 N·m (310.0 ft-lbs)

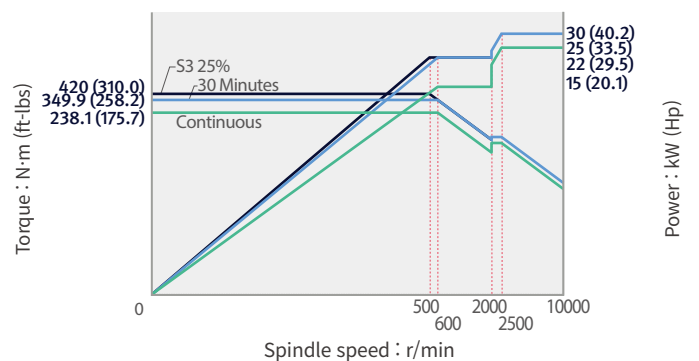


POWER | TORQUE

SIEMENS


12000 r/min, Direct

Motor power : 27.8 /18.5 kW (37.3/24.8 Hp)
Torque : 234.0 N·m (172.7 ft-lbs)

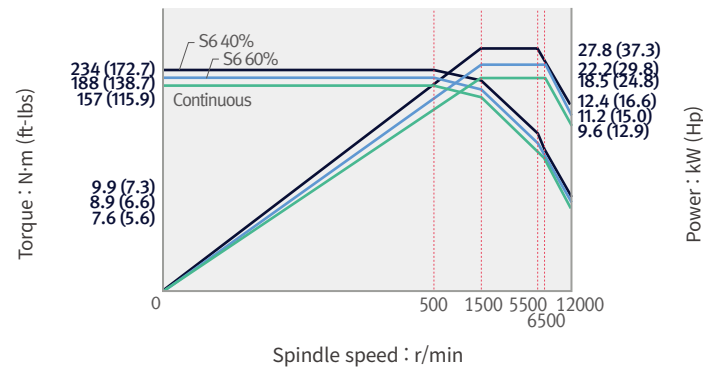


6000 r/min, Gear

Motor power : 27.8 /18.5 kW (37.3/24.8 Hp)
Torque : 760.0 N·m (560.9 ft-lbs)

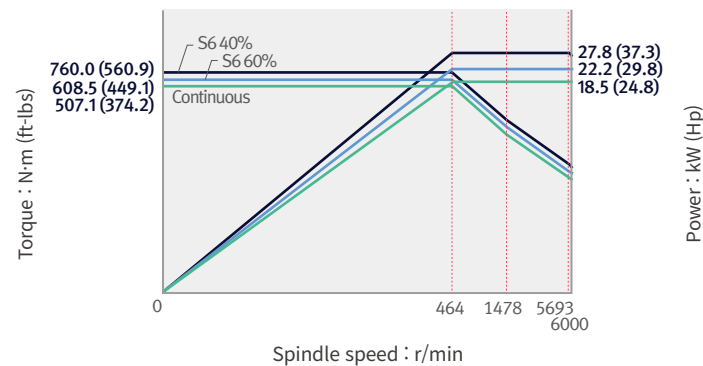

8000 r/min, Belt


Motor power : 27.8 /18.5 kW (37.3/24.8 Hp)
Torque : 234.0 N·m (172.7 ft-lbs)

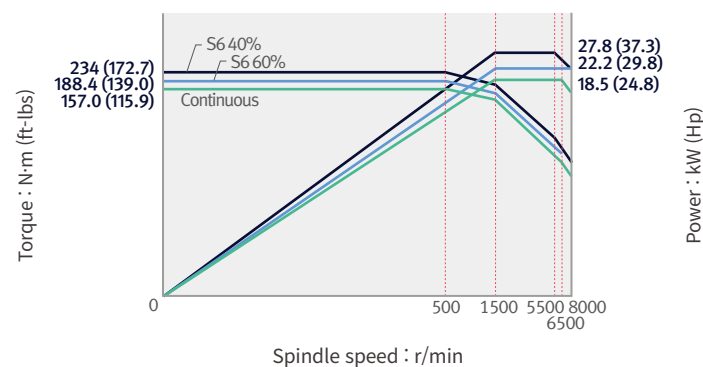


DIMENSIONS

Units : mm (inch)

TOP

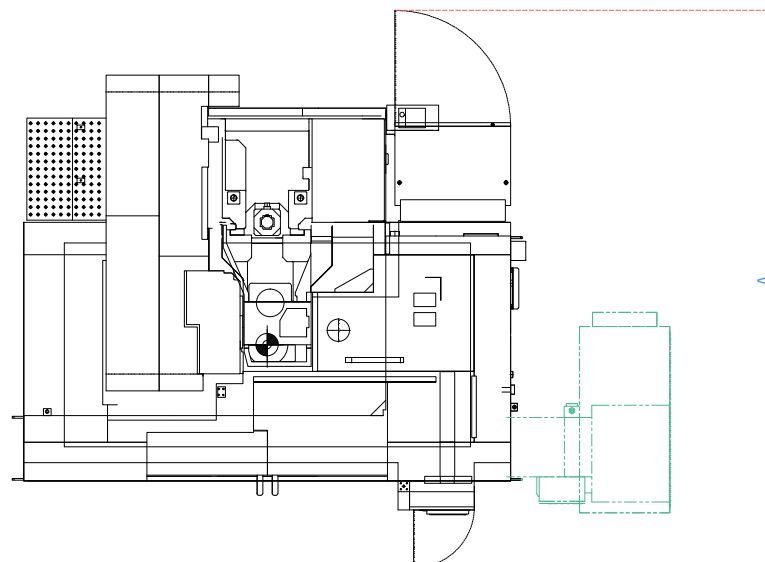

FRONT

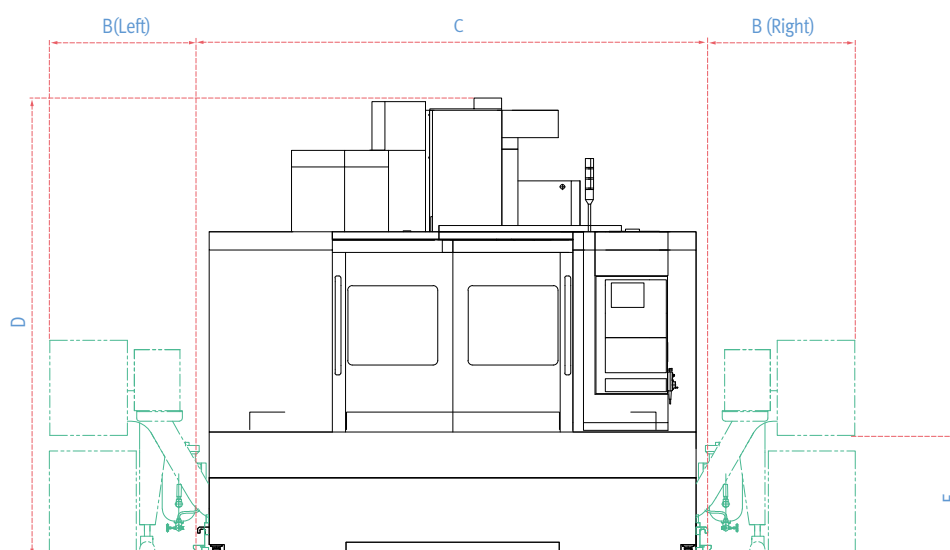



	A (Max. machine length)	B* (Additional width to accommodate the side chip conveyor)	C (Max. machine width)	D (Max. machine height)	E (Height from the floor to the chip outlet)
Mynx 5400 II	3450 (135.8)	Left & Right : 930 (36.6)	3350 (131.9)	3020 (118.9)	830 (32.7)
Mynx 5400/50 II	3450 (135.8)	Left & Right : 930 (36.6)	3350 (131.9)	2920 (115.0)	830 (32.7)
Mynx 6500 II	3670 (144.5)	Left & Right : 930 (36.6)	3350 (131.9)	3110 (122.4)	830 (32.7)
Mynx 6500/50 II	3670 (144.5)	Left & Right : 930 (36.6)	3350 (131.9)	3020 (118.9)	830 (32.7)
Mynx 7500 II	4410 (173.6)	Left & Right : 1060 (41.7)	3900 (153.5)	3230 (127.2)	980 (38.6)
Mynx 7500/50 II	4680 (184.3)	Left & Right : 1060 (41.7)	4050 (159.4)	3300 (129.9)	980 (38.6)
Mynx 9500	5350 (210.6)	Left & Right : 1170 (46.1)	6560 (258.3)	3600 (141.7)	770 (30.3)

* Contact DN Solutions for more information to rear chip conveyor.



TABLE DIMENSIONS

Mynx 5400 II , Mynx 5400/50 II



Units : mm (inch)

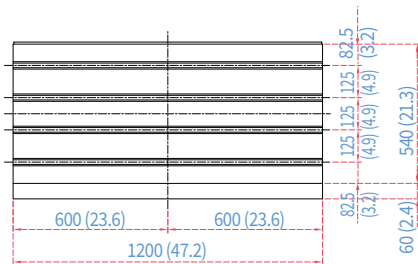



Mynx 6500 II , Mynx 6500/50 II

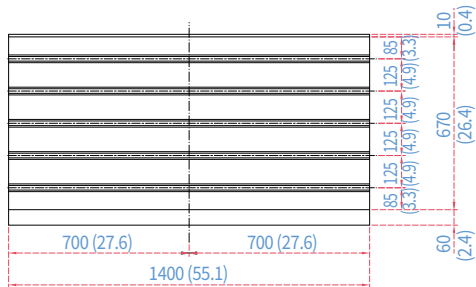

Mynx 7500 II Mynx 7500/50 II

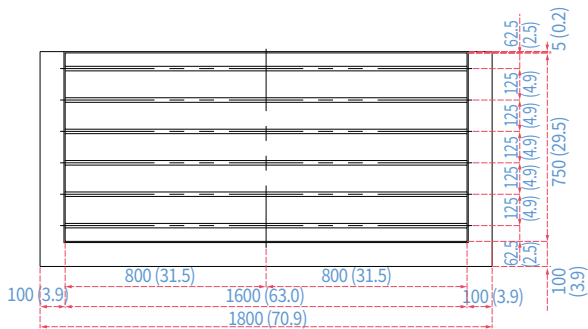

Mynx 9500

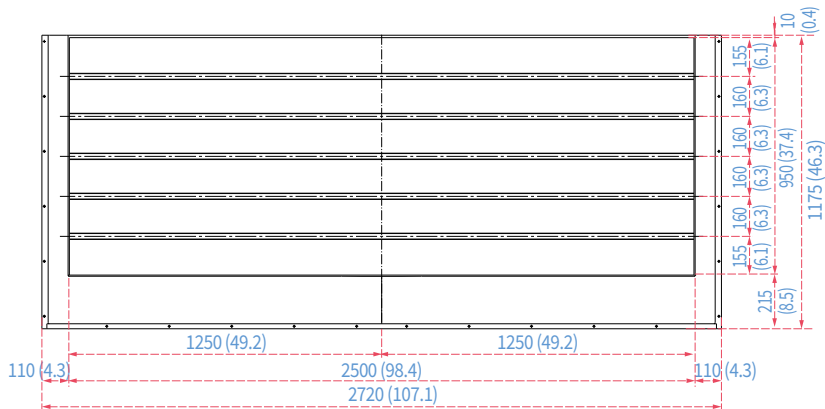

MACHINE SPECIFICATIONS

Description			Unit	Mynx 5400 II	Mynx 5400/50 II	Mynx 6500 II	Mynx 6500/50 II	Mynx 7500 II	Mynx 7500/50 II	Mynx 9500
Travels	Travel distance	X axis	mm (inch)	1020 (40.2)		1270 (50.0)		1525 (60.0)		2500 (98.4)
		Y axis	mm (inch)	550 (21.7)		670 (26.4)		770 (30.3)		950 (37.4)
		Z axis	mm (inch)	530 (20.9)		625 (24.6)		625 (24.6)		850 (33.5)
	Distance from spindle nose to table top		mm (inch)	150 ~ 680 (5.9~26.8)	200 ~ 730 (7.9~28.7)	150 ~ 775 (5.9~30.5)	200 ~ 825 (7.9~32.4)	150 ~ 775 (5.9~30.5)	200 ~ 825 (7.9~32.4)	200 ~ 1000 (7.9~39.4)
Table	Table size		mm (inch)	1200 x 540 (47.2 x 21.3)		1400 x 670 (55.1 x 26.4)		1600 x 750 (63.0 x 29.5)		2500 x 950 (98.4 x 37.4)
	Table loading capacity		kW (Hp)	1000 (1341.0)		1300 (1743.3)		1500 (2011.5)		3500 (4693.5)
	Table surface type		mm	T-SLOT (4-125 x 18H8)		T-SLOT (5-125 x 18H8)		T-SLOT (6-125 x 18H8)		T-SLOT (5-160 x 22H8)
Spindle	Max. spindle speed	Direct	r/min	8000 {12000}	-	8000 {12000}	-	8000 {12000}	-	-
		Belt	r/min	-	6000 {6000} {8000}	-	6000 {6000} {8000}	-	6000 {6000} {8000}	-
		Gear	r/min	-	{6000}	-	{6000}	-	{6000}	6000
		Built in	r/min	-	-	-	-	-	-	{10000}
	Taper		-	ISO #40	ISO #50	ISO #40	ISO #50	ISO #40	ISO #50	ISO #50
	Spindle power	Direct	kW (Hp)	15/11 {15.6} (20.1/14.8 {20.9})	-	15/11 {15.6} (20.1/14.8 {20.9})	-	15/11 {15.6} (20.1/14.8 {20.9})	-	-
		Belt	kW (Hp)	-	15/11 {18.5/15} {15/11} (20.1/14.8 {24.8/20.1} {20.1/14.8})	-	20/18.5 {18.5/18.5}{15/11} (26.8/24.8 {24.8/24.8} {20.1/14.8})	-	18.5/15 {22/18.5}{15/11} (24.8/18.5 {29.5/24.8} {20.1/14.8})	-
		Gear	kW (Hp)	-	{30/18.5} (40.2/24.8)	-	{30/18.5} (40.2/24.8)	-	{30/18.5} (40.2/24.8)	30/18.5 (40.2/24.8)
		Built in	kW (Hp)	-	-	-	-	-	-	{30/25} (40.2/33.5)
	Max. spindle torque	Direct	N · m (ft-lbs)	286.5 {165.5} (211.4 {122.1})	-	286.5 {165.5} (211.4 {122.1})	-	286.5 {165.5} (211.4 {122.1})	-	-
		Belt	N · m (ft-lbs)	-	286.5 {307.2}{286.5} (211.4 {226.7}{211.4})	-	286.5 {307.2}{286.5} (211.4 {226.7}{211.4})	-	307.2 {365.5} {286.5} (226.7 {269.7} {211.4})	-
		Gear	N · m (ft-lbs)	-	{617.4} {455.6}	-	{617.4} {455.6}	-	{617.4} {455.6}	617.4 (455.6)
		Built in	N · m (ft-lbs)	-	-	-	-	-	-	{420} {310.0}
Feedrates	Rapid traverse rate	X axis	N · m (ft-lbs)	30 (22.1)						16 (11.8)
		Y axis	N · m (ft-lbs)	30 (22.1)						16 (11.8)
		Z axis	N · m (ft-lbs)	24 (17.7)						16 (11.8)
Automatic Tool Changer	Rapid traverse rate	Tool shank	-	BT 40 {CAT40/DIN40}	BT 50 {CAT50/DIN50}	BT 40 {CAT40/DIN40}	BT 50 {CAT50/DIN50}	BT 40 {CAT40/DIN40}	BT 50 {CAT50/DIN50}	BT 50 {CAT50/DIN50}
		Pull stud	-	PS806	P50T-1 45deg	PS806	P50T-1 45deg	PS806	P50T-1 45deg	P50T-1 45deg
	Tool storage capa.		ea	30 {40}	24	30 {40}	24 {30}	30 {40}	24 {40}	30 {40}
	Max. tool diameter	Continous	mm (inch)	80 {76} (3.1 {3.0})	125 (4.9)	80 {76} (3.1 {3.0})	125 (4.9)	80 {76} (3.1 {3.0})	125 (4.9)	125 (4.9)
		Without Adjacent Tools	mm (inch)	125 (4.9)	220 (8.7)	125 (4.9)	220 (8.7)	125 (4.9)	220 (8.7)	220 (8.7)
	Max. tool length		mm (inch)	300 (11.8)	350 (13.8)	300 (11.8)	350 (13.8)	300 (11.8)	350 (13.8)	350 (13.8)
	Max. tool weight		kg (lb)	8 (17.6)	20 (44.1)	8 (17.6)	20 (44.1)	8 (17.6)	20 (44.1)	20 (44.1)
	Max. tool moment		N · m (ft-lbs)	5.88 (4.3)	22 (16.2)	5.88 (4.3)	22 (16.2)	5.88 (4.3)	22 (16.2)	22 (16.2)
	Tool selection			MEMORY RANDOM						
	Tool change time (Tool-to-tool)		sec	1.3	2.5	1.3	2.5	1.3	2.5	2.5
	Tool change time (Chip-to-chip)		sec	3.7	5.5	3.7	5.5	3.7	5.5	6.67
Power source	Electric power supply (rated capacity)	Direct	kVA	32.2 {44.4}	-	35.1 {47.3}	-	38.5 {50.7}	-	-
		Belt	kVA	-	36.1 {36.1} {40}	-	39.4 {44.6}	-	47.3 {51.8} {42.9}	-
		Gear	kVA	-	{47.7}	-	{48.4}	-	{51.8}	47.0
		Built in	kVA	-	-	-	-	-	-	{54.2}
	Compressed air supply		Mpa	0.54						
Tank capacity	Coolant tank capacity		L	420				470		500
Machine Dimensions	Height		mm (inch)	F_3012 (118.6) H/S_3117 (122.7)	2920 (115.0)	F_3107 (122.3) H/S_3216 (126.6)	3016 (118.7)	F_3227 (127.0) H/S_3337 (131.4)	3292 (129.6)	3598 (141.7)
	Length		mm (inch)	2467 (97.1)	2467 (97.1)	2692 (106.0)	2692 (106.0)	3900 (153.5)	3900 (153.5)	4315 (169.9)
	Width		mm (inch)	3350 (131.9)	3350 (131.9)	3350 (131.9)	3350 (131.9)	4050 (159.4)	4050 (159.4)	6480 (255.1)
	Weight		kg (lb)	7000 (15432.1)	7500 (16534.4)	9000 (19841.3)	9500 (20943.6)	13500 (29762.0)	13500 (29762.0)	23000 (50705.6)
Control	NC system		-	DN Solutions Fanuc i Plus, Fanuc 32i {SIEMENS S828D / HEIDENHAIN TNC 620}						

RESPONDING TO CUSTOMERS **ANYTIME, ANYWHERE**

DN Solutions Global Network

66 Countries | **140** + Sales networks | **3** Factories | **6** Regional HQs



CUSTOMER SUPPORT AND SERVICES

We're there for you whenever you need us.

We help our customers operate at maximum efficiency by providing them with a range of tried, tested and trusted services - from pre-sales consultancy to post-sales support.



Field services

- On-site service
- Machine installation and testing
- Scheduled preventive maintenance
- Machine repair service



Parts supply

- Supplying a wide range of original DN Solutions spare parts
- Parts repair service



Training

- Programming, machine setup and operation
- Electrical and mechanical maintenance
- Applications engineering



Technical support

- Supports machining methods and technology
- Responds to technical queries
- Provides technical consultancy

**Head Office**

19F, 10, Tongil-ro, Jung-gu Seoul,
Republic of Korea, 04527
Tel: +82-2-6972-0370/0350
Fax: +82-2-6972-0400

DN Solutions America

19A Chapin Road,
Pine Brook New Jersey 07058,
United States
Tel: +1-973-618-2500
Fax: +1-973-618-2501

DN Solutions Europe

Emdener Strasse 24, D-41540
Dormagen, Germany
Tel: +49-2133-5067-100
Fax: +49-2133-5067-111

DN Solutions India

No.82, Jakkuar Village
Yelahanka Hobli,
Bangalore-560064
Tel: + 91-80-2205-6900
E-mail: india@dncompany.com

DN Solutions China

Room 101,201,301, Building 39 Xinzhuang Highway
No.258 Songjiang District China Shanghai (201612)
Tel: +86 21-5445-1155
Fax: +86 21-6405-1472

DN Solutions Vietnam

M.O.R.E building 2F, 40A-40B Ut Tich Street, 04 Ward 04,
District Tan Binh District, Ho Chi Minh City, Vietnam
Tel: +84 28-7304-0163

Sales inquiry

sales@dncompany.com